
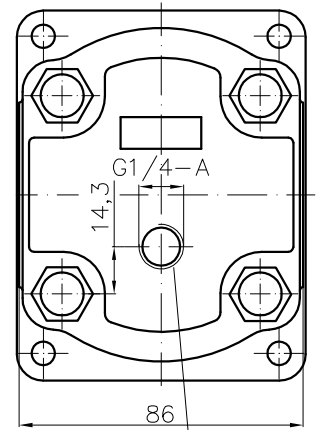


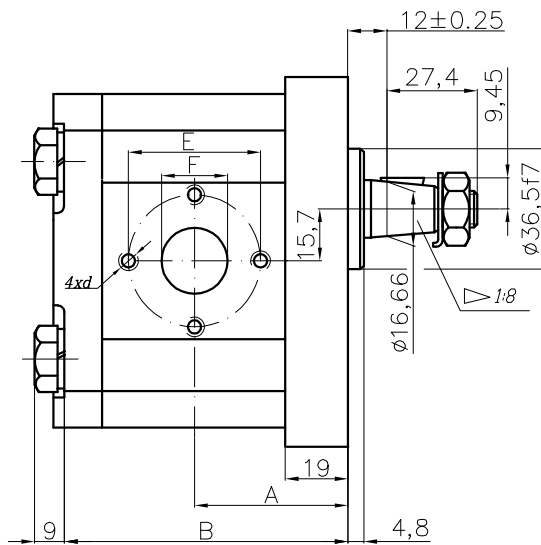

A diagram showing a circular cross-section of a pipe. A horizontal line passes through the center of the circle, with arrows pointing towards the center from both ends. A vertical dashed line also passes through the center of the circle, extending from the top to the bottom. At the bottom of the vertical dashed line, there is a horizontal bracket-like shape.

Type	Displacement	Pressure	Speed	Dimensions							
				A	B	Inlet			Outlet		
						E	F	d	E	F	d
	q ,[cm³]	Pmax, [bar]	n ,[мин ⁻¹]	mm	mm	mm	mm	mm	mm	mm	mm
						30,2±0,1	13,1±0,1	M6-6H	30,2±0,1	13,1±0,1	M6-6H
20MR6,3X546	6,3	200	650...3500	44	83±0,1						
20MR8,2X546	8,2	200	650...3500	45,5	85,9±0,1						
20MR10X546	10	200	650...3500	47	89±0,1	39,7±0,1	19±0,1	M8-6H	39,7±0,1	19±0,1	M8-6H
20MR11X546	11	200	650...3500	48	91,1±0,1						
20MR12X546	12	200	650...3500	48,6	92,3±0,1						
20MR14X546	14	200	650...3500	50	95,4±0,1						
20MR15X546	15	200	650...3500	51	96,9±0,1						
20MR16X546	16	200	650...3500	52	98,6±0,1						
20MR19X546	19	180	650...2500	54	103,5±0,1						
20MR22X546	22	180	650...2500	57	108,5±0,1						
20MR25X546	25	160	650...2000	59,2	113,4±0,1						
20MR14X546A	14	200	650...3500	50	95,4±0,1						